


## RC 3.6 speed oven

The RC 3.6 speed oven has two function type as below:

**RC 3.6S** : 2-Mag, 2-Heater, 15x faster than traditional methods.

**RC 3.6E** : 1-Mag, 1-Heater, 6x faster than traditional methods.

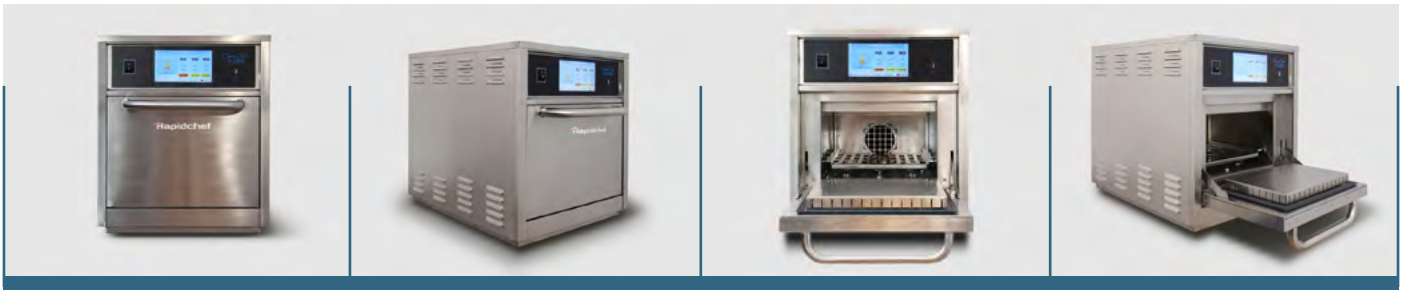

### RC 3.6S

### RC 3.6E

#### Overall dimensions

Model	RC 3.6S	RC 3.6E
W x D x H (With legs)	460 x 710 x 599mm	460 x 710 x 599mm

#### Cook chamber dimensions/ Net Weight

Model	RC 3.6S	RC 3.6E
W x D x H	306 x 306 x 195mm	306 x 306 x 195mm
The distance from rack/turntable to top	147mm	147mm
Weight	78Kg	66Kg

#### Wooden case dimensions/ Gross Weight


Model	RC 3.6S	RC 3.6E
W x D x H	525 x 925 x 780mm	525 x 925 x 780mm
Weight	96Kg	80Kg

### How it works:

**The RC 3.6 speed oven** uses forced convection, high speed hot air impingement, top-launched double microwave system, double heater system, catalytic converter and smart menu system to cook food rapidly without compromising quality up to **15 times faster than traditional methods.**

**RC 3.6S: 2-Mag, 2-Heater.**

**RC 3.6E: 1-Mag, 1-Heater.**

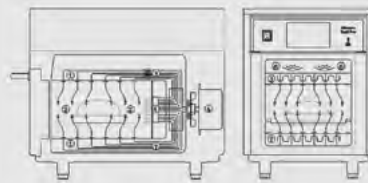

1. Forced Convection
2. Impinged Air
3. Impingement Heater
4. Catalytic Converter
5. Blower Motor
6. Top-Launched Microwave
7. Bottom Infra-red radiant

## RC 3.6S and RC 3.6E - Technical Specification

Model	RC 3.6S	RC 3.6E
Control Mode	Touch mode	Touch mode
Cooking Speed	<b>15 times faster than traditional methods</b>	<b>6 times faster than traditional methods</b>
Max Input Power	6.5Kw	3.6Kw
Power Supply	Single phase	208-250 VAC, 50/60Hz. Max 32A
	3-phase, Wye	380-440 VAC, 50/60Hz. Max 18A
	3-phase, Delta	230 VAC, 50/60Hz. Max 18A
Power Cord	Single phase	3 wire (including ground) P+N+G
	3-phase, Wye	380-440 VAC: 5 wire (including ground) 3P+N+G
	3-phase, Delta	3-Phase, Delta, 230VAC: 4 wire (including ground) 3P+G
Breaker Type	D type	D type
Heat preservation consumption in standby mode	0.5-0.6 kw/hour	0.4-0.5 kw/hour
The average power consumption in cooking mode	2.0-2.5 kw/hour	1.5-2.0 kw/hour
Temperature setting: °C-280°C in 2°C steps.		
Time setting: 00:00-99:00 in 10s steps		
Microwave setting: 0-100% in 10% steps		
Convection setting: Variable high speed convection fan, controllable between 10-100% in 1 %		

**RC 3.6S**  
**RC 3.6E**

www.rapidchef.co.uk  
Tel. +44 (0)161 885 3151  
Email. sales@rapidchef.co.uk